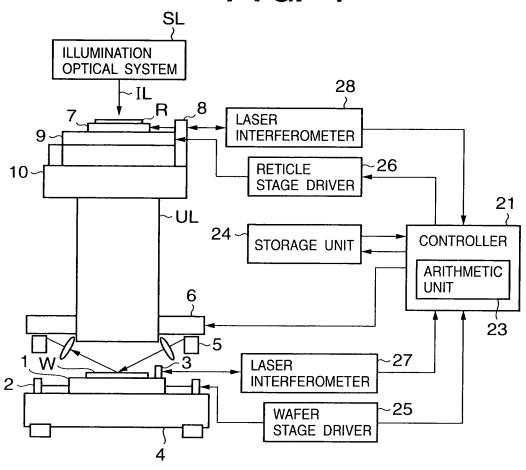
FIG. 1






FIG. 2

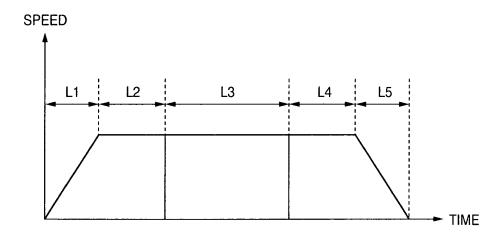
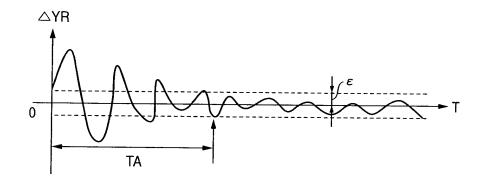


FIG. 3



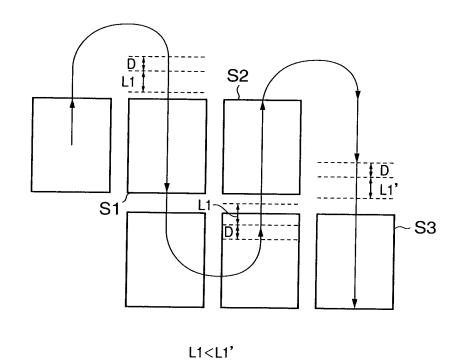


FIG. 5

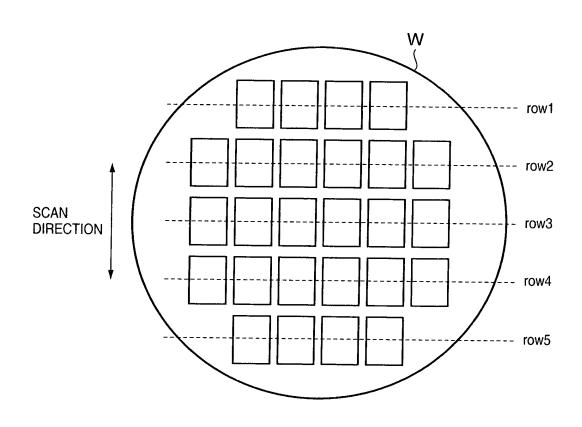


FIG. 6



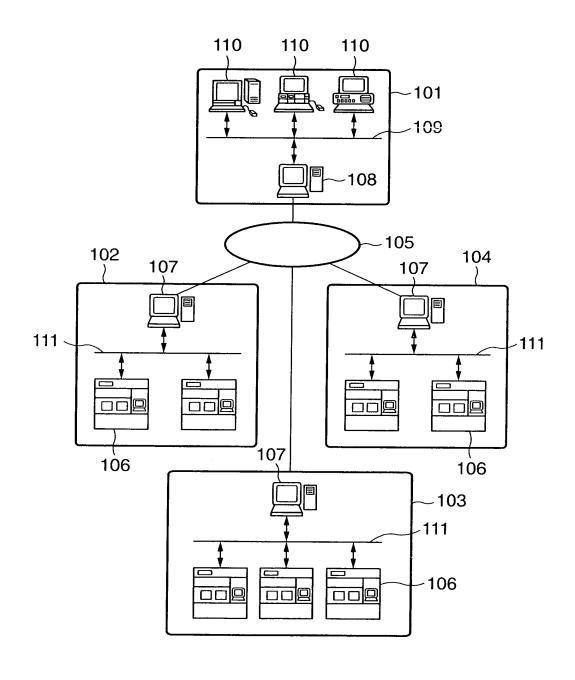



FIG. 7

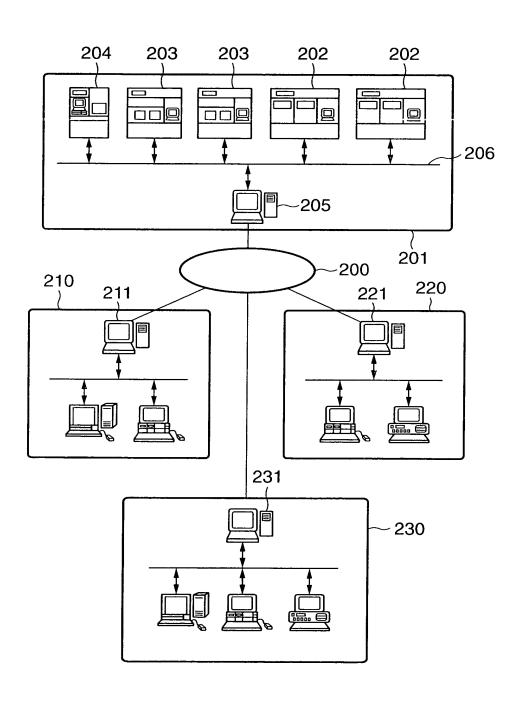

URL http://www.maintain.co.jp/db/input.html
TROUBLE DB INPUT WINDOW
OCCURRENCE DATE 2000/3/15 ~ 404
TYPE OF APPARATUS ******** ~ 401
SUBJECT OPERATION ERROR (START-UP ERROR) ~403
SERIAL NUMBER S/N 465NS4580001 ~ 402
DEGREE OF URGENCY D ~405
SYMPTOM LED IS KEPT FLICKERING AFTER POWER-ON 406
REMEDY POWER ON AGAIN 企
(PRESS RED BUTTON IN ACTIVATION) 407
PROGRESS INTERIM HAS BEEN DONE
SEND (RESET) 410 411 412
LINK TO RESULT LIST DATABASE SOFTWARE LIBRARY OPERATION GUIDE
OF LIGHT OF ENAMEL CONTACT OF

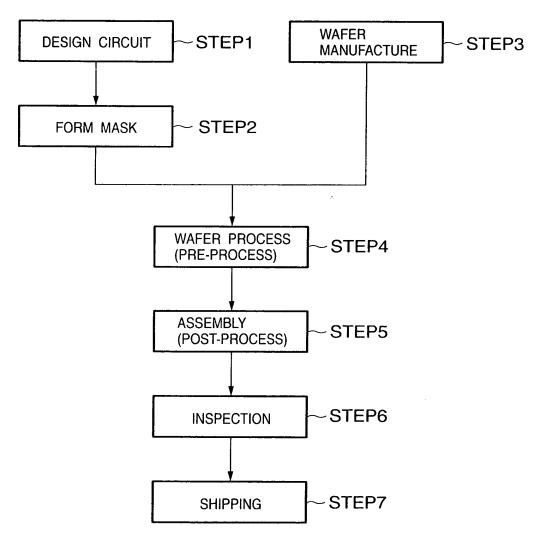

SEMICONDUCTOR DEVICE MANUFACTURING FLOW

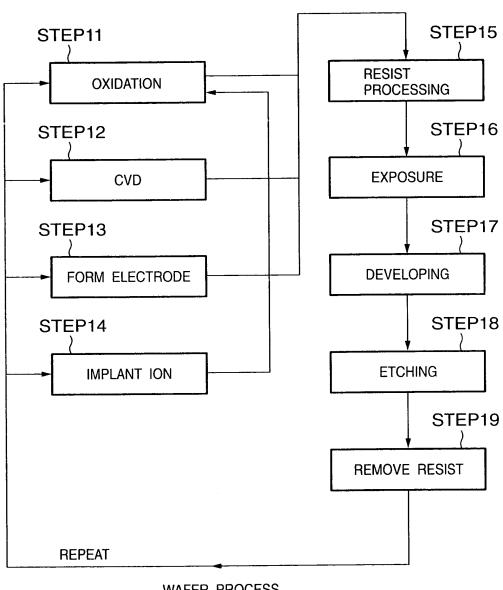

WAFER PROCESS